

Unit: mm



Size-No.	Snap Pin								Applicable shaft		
	d ₁		d ₂	ℓ	R	h	S	L	D	H	
	Basic	Tol.	Approx.	Approx.	Approx.	Approx.	Max.	Approx	Ref.	Ref.	
SSP-	4	1	±0.02	3	6	2	1	0.5	16.3	4	1.2
	5	1		3	6.5	2.5	1.5	0.5	17.9	5	1.2
	6	1.2	±0.03	3.6	7.8	3	1.8	0.6	21.2	6	1.5
	8	1.6		4.8	10.4	4	2.4	0.8	27.7	8	1.9
	10	1.8		5.4	12.2	5	3.2	0.9	32.6	10	2.2
	12	1.8		5.4	13.2	6	4.2	0.9	35.8	12	2.2
	14	2		6	15	7	5	1	40.6	14	2.4
	16	2		6	16	8	6	1	43.8	16	2.4

Material = SWB. Finish = Zinc plate plus Chromate.
 Diameter of wire rod as material


Notes

1. Our products with little marketability may not be in stock. When employing our products, consult with us for their availability.

Retaining Pins

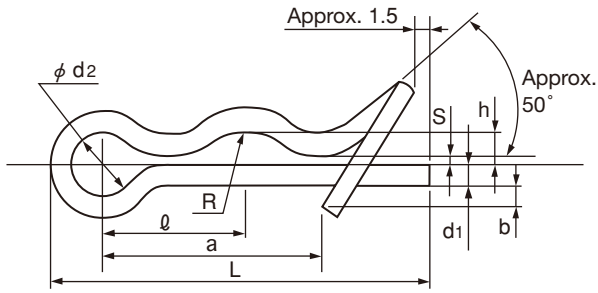

Applicable shaft

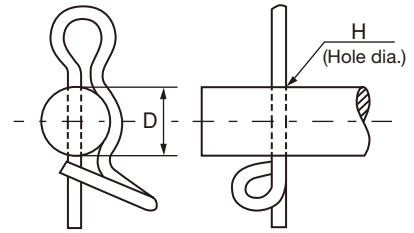

Unit: mm

Size-No.	Retaining Pin														Applicable shaft	
	d ₁		d ₂		∅	R	h		S	a	b	L		d ₃	D	H
	Basic	Tol.	Basic	Tol.	Approx.	Approx.	Basic	Tol.	Max.	Approx.	Approx.	Basic	Tol.	Approx.	Ref.	Ref.
SSP- 5012	1	±0.02	3		6.5	2.5	1.5		0.5	9.5	1	17.9		2.2	5	1.2
6013	1.2		3.6	±0.4	7.8	3	1.8	±0.3	0.6	11.4	1.2	21.2	±1	2.4	6	1.5
8012	1.6	±0.03	4.8		10.4	4	2.4		0.8	15.2	1.6	27.7		3.4	8	1.9
10011	1.8		5.4	±0.6	12.2	5	3.2	±0.4	0.9	18.1	1.8	32.6	±1.5	3.6	10	2.2
12012	1.8		5.4		13.2	6	4.2		0.9	20.8	2	35.8		3.8	12	2.2

Material = SWB. Finish = Zinc plate plus Chromate.
Diameter of wire rod as material

Notes

- Our products with little marketability may not be in stock. When employing our products, consult with us for their availability.